



# Round Lake Road Widening & Extension

## From Lake/Orange County Line to North of S.R. 44

Newsletter #1

September 2020

### Design Underway


Lake County has begun the design phase for the widening and extension of Round Lake Road from the Lake/Orange County Line to just north of State Road (S.R.) 44, a distance of approximately 5 miles. The design concept was developed from a Project Development & Environment (PD&E) Study approved by Lake County in May 2019, and the proposed roadway improvements are consistent with the Lake-Sumter Metropolitan Planning Organization’s Long Range Transportation Plan and the long-term vision for growth management in East Lake County.

Lake County is experiencing significant growth, and this project will provide a contiguous north/south corridor that improves connectivity and alleviates traffic congestion within the existing East Lake County transportation network. With the anticipated completion of the Wekiva Parkway project, this enhanced infrastructure will also afford the opportunity to increase the economic vitality of this region.

### Project Details

The proposed roadway will provide two 12-foot-wide travel lanes in each direction, 5-foot-wide bicycle lanes, full and directional median openings, and dedicated left and right turn lanes in various locations of the project. The design will also include a 12-foot-wide multi-use trail and a 6-foot-wide sidewalk.

The project will be designed as a four-lane divided roadway. However, Round Lake Road will initially be constructed as a two-lane roadway. It is anticipated that the project will include roundabouts at Sullivan Ranch Boulevard, Wolf Branch Road, Scenic Hills Drive and another location to be determined. Traffic signals will be located at the S.R. 46 and S.R. 44 intersections.

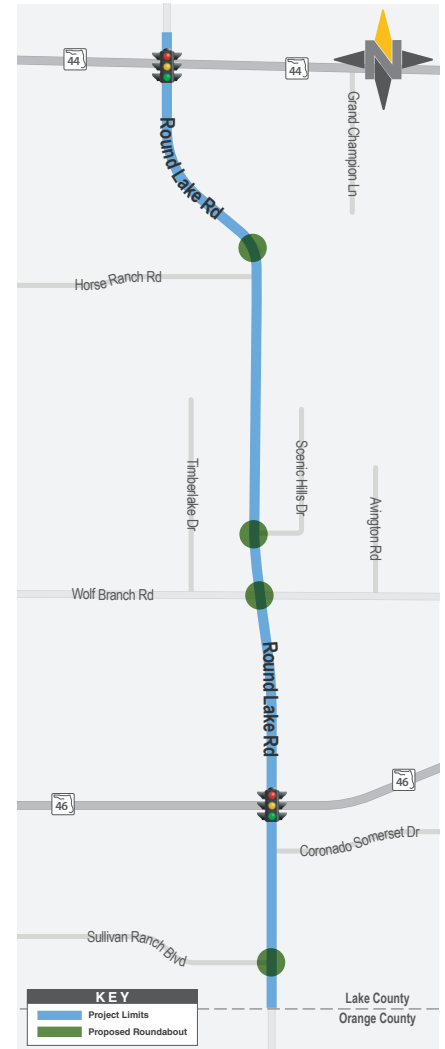

### Round Lake Road Widening & Extension Design Schedule

	Q3 2020	Q4 2020	Q1 2021	Q2 2021	Q3 2021	Q4 2021	Q1 2022	Q2 2022	Q3 2022
Project Start	★								
Data Collection	█								
Design	█								
Public Information Meeting			★						
Permitting				█					
Public Information Meeting					★				
ROW - TBD									
Construction - TBD									

For more info:



**George Gadiel, P.E., Lake County Project Manager**

350 N. Sinclair Ave., Tavares, FL 32778 | 352-253-9092 | ggadiel@lakecountyfl.gov

or visit the projects page at:

[www.lakecountyfl.gov/departments/public\\_works/engineering/completed\\_studies.aspx](http://www.lakecountyfl.gov/departments/public_works/engineering/completed_studies.aspx)